

# SKF Explorer steel/steel plain bearings

Robust and virtually maintenance-free for reduced costs and optimized field performance







# Optimized for performance without compromise

SKF Explorer steel/steel plain bearings are virtually maintenance-free\* and extremely robust – the optimal combination for reducing costs and improving reliability.

## Reduce costs

SKF Explorer steel/steel plain bearings are initially lubricated and sealed to eliminate the need for relubrication in applications with low to moderate levels of contamination, such as those in off-highway applications. This generates significant savings by reducing maintenance costs and grease consumption. These virtually maintenance-free bearings also improve reliability by eliminating failures due to missed lubrication intervals and improper lubrication practices. All of this adds up to reduced Total Cost of Ownership (TCO).

## Improved robustness and dynamic load rating

Combining improved corrosion resistance, heavy-duty sealing and a relubrication-free design with a steel/steel sliding combination makes SKF Explorer steel/steel plain bearings more robust than ever. Plus, extensive research and testing under extreme loads has resulted in increased dynamic load ratings for SKF Explorer steel/steel plain bearings, an increase of 50% when compared to conventional steel/steel bearings.

### End-user benefits

- Reduced Total Cost of Ownership
- Reduced maintenance costs
- Reduced grease consumption
- Increased uptime
- Improved reliability
- Reduced environmental impact
- Retrofitable and interchangeable

### OEM benefits

- Improved differentiation in the market
- Reduced operation costs for customers
- Reduced environmental impact
- Reduced warranty claims

\* Virtually maintenance-free means that the bearing should function as intended without being relubricated as long as the tribological system is not compromised. The term maintenance-free does not imply that these bearings should not be inspected as part of a regularly scheduled maintenance programme.

# SKF Explorer steel/steel plain bearings:

## Reduced Total Cost of Ownership (TCO)

SKF Explorer steel/steel plain bearings can offer significantly longer service life compared to conventional steel/steel plain bearings and they are virtually maintenance-free. Direct savings result from fewer bearing replacements, plus longer service life means less machine downtime and lost production for repairs. When combined with the savings associated with not having to relubricate, SKF Explorer steel/steel plain bearings offer reduced total cost of ownership (→ **diagram 1**).

## Longer basic rating life

To prove the effectiveness of the new tribological system, SKF Explorer steel/steel plain bearings were tested against conventional steel/steel plain bearings. The extensive laboratory and field tests showed that the relubrication-free SKF Explorer steel/steel plain bearings last significantly longer than the conventional bearings, even when they were frequently relubricated.

The positive results from these tests are the basis for the determination of basic dynamic load ratings and the basic rating life calculation for SKF Explorer steel/steel plain bearings.

## Dynamic load ratings


In line with established practice, the dynamic load rating for SKF Explorer steel/steel plain bearings has been determined from extensive research and life testing. The result is a dynamic load rating that is 50% higher compared to conventional steel/steel plain bearings with the specific load factor K being increased from 100 to 150 N/mm<sup>2</sup> (→ **diagram 2**). This opens up a wider range of potential applications and the possibility for downsizing.

## Reduce environmental impact

In addition to using non-toxic grease in SKF Explorer steel/steel plain bearings, once they are sealed, the tribological system is so robust that relubrication is not necessary. The result: no additional grease is consumed and no grease is purged from the bearings, which significantly reduces environmental impact.

## Wear and corrosion-resistant

SKF Explorer steel/steel plain bearings are phosphated and then undergo further treatment to improve wear resistance and minimize the risk of corrosion.

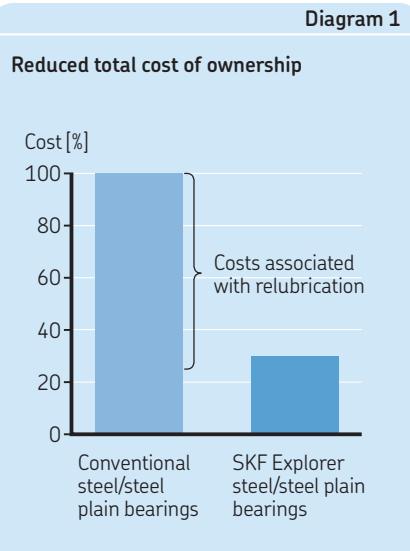



## Retrofitable

SKF Explorer steel/steel plain bearings can replace all conventional open or sealed radial steel/steel plain bearings currently available in the market place.

## Wide temperature range

The seals and grease can accommodate operating temperatures ranging from -45 to +110 °C (-45 to +230 °F).

# features and benefits

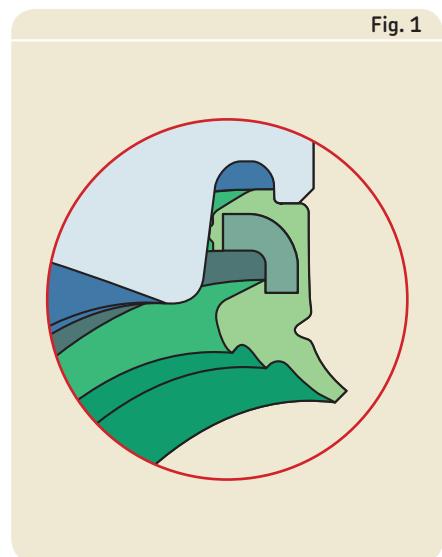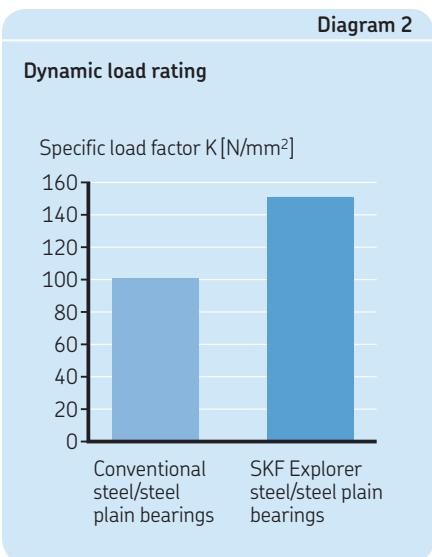


## Sealed for protection

SKF Explorer steel/steel plain bearings are equipped with triple-lip heavy-duty contact seals. These seals, designed for contaminated environments, do an excellent job protecting the bearing's tribological system over the life of the bearing. SKF triple lip heavy-duty contact seals are the standard sealing solution for all SKF Explorer steel/steel plain bearings.

To perform well for long periods, the seal is reinforced with a stamped steel insert (→ fig. 1). The steel insert protects the seal lips from larger sized contaminants. It also significantly increases the seal's retention forces and stiffness. The design of the seal lips retains the lubricant while virtually eliminating the ingress of contaminants into the bearing (→ fig. 2).

## Seal life test results

Tests showed that SKF heavy-duty contact seals last up to three times longer than standard seals (→ diagram 3). Made of oil and wear-resistant acrylonitrile-butadiene rubber (NBR), the seals are highly resistant to aging and deformation, which further extends the service life of these seals.

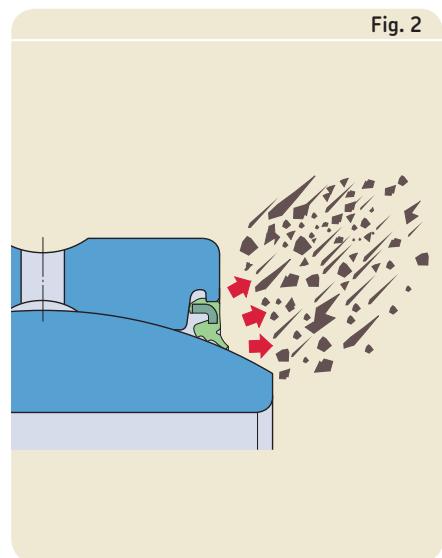

# Selection of bearing size

## Load ratings

There is no standardized method for determining the load ratings of spherical plain bearings and rod ends, nor is there any standardized definition. As different manufacturers define load ratings differently, it is not possible to compare the load ratings of bearings produced by one manufacturer with those of another.

### Basic dynamic load rating

The basic dynamic load rating  $C$  is used, together with other influencing factors, to determine the basic rating life of spherical plain bearings and rod ends. As a rule, it represents the maximum load that a spherical plain bearing or rod end can accommodate at room temperature when there is movement between the sliding contact surfaces (→ fig. 3). The maximum load in any application should always be considered in relation to the required rating life. The basic dynamic load ratings quoted in the product tables are based on the specific load factor  $K$  (→ table 1) and the area of the projected sliding surface.

### Basic static load rating

The basic static load rating  $C_0$  represents the maximum permissible load that a spherical plain bearing or rod end can accommodate when there is no relative movement between the sliding contact surfaces (→ fig. 4). For spherical plain bearings, the basic static load rating represents the maximum load that the bearing can accommodate at room temperature without inadmissible deforming, fracturing or damaging the sliding contact surfaces.

The basic static load ratings quoted for SKF spherical plain bearings are based on a specific static load factor  $K_0$  (→ table 1) and the area of the projected sliding surface. It is assumed that the bearing is adequately supported. To fully exploit the static load rating of a spherical plain bearing, it is generally necessary to use shafts and housings made of high-strength materials. The basic static load rating must also be considered when bearings are dynamically loaded and subjected to additional heavy shock loads. The total load in these cases must not exceed the basic static load rating.

For rod ends, it is the strength of the housing at room temperature, under a constant load acting in the direction of the shank axis, that is the determining factor. The basic static load rating represents a safety factor of at least 1,2 relative to the yield strength of the material of the rod end housing, under the above conditions.

Fig. 3

Dynamic bearing load

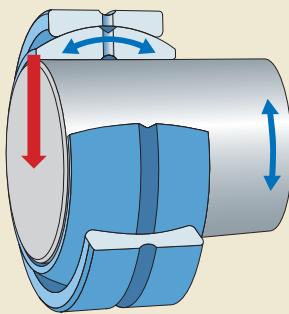
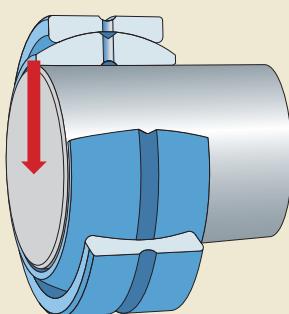


Fig. 4

Static bearing load



**Table 1****Specific load factors**

**SKF Explorer steel/  
steel plain bearings**    dyn. K    stat.  $K_0$

	N/mm <sup>2</sup>
Metric sizes	150
Inch sizes	150      300

## Basic rating life

For spherical plain bearings, a lubricant film that fully separates the sliding contact surfaces cannot be formed. Therefore, the sliding contact surfaces make direct contact with each other, resulting in a certain and unavoidable degree of wear. This increases the internal clearance in the bearing.


Regarding the life of spherical plain bearings or rod ends, a distinction is made between the basic rating life and the service life. The basic rating life is a theoretical guideline value used when selecting a bearing for a particular application. Service life depends on the actual operating conditions and is the actual life achieved by an individual bearing in service.

The basic rating life is based on a large number of laboratory tests. Bearings were tested for an operating period until a specific increase in bearing clearance ( $>0,004 d_k$ ) or friction ( $\mu>0,2$ ) occurred. The basic rating life considers several influencing factors and can be expressed in operating hours or the number of oscillating movements (→ **fig. 5**). In some cases, however, it is not possible to quantify factors such as contamination, corrosion and complex kinematic loads. Therefore, the basic rating life can be attained or exceeded by the majority of many apparently identical spherical plain bearings under the same operating conditions.

The service life cannot be calculated as it is too complex to determine and evaluate all the influencing factors. Therefore, depending on the application conditions, the service life may differ from the basic rating life.

**NOTE:** By using the SKF Bearing Calculator, it is possible to perform the necessary calculations to select a spherical plain bearing with the click of a mouse.

The SKF Bearing Calculator is available online at [skf.com/bearingcalculator](http://skf.com/bearingcalculator).

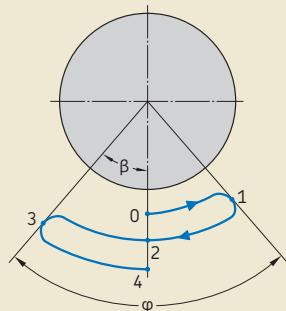**Fig. 5****Angle of oscillation**

$$\varphi = \text{angle of oscillation} = 2\beta$$

A complete oscillation is from point 0 to point 4 and =  $4\beta$

# Selection of bearing size

## Load

When considering load, a distinction is made between:

- Load direction
  - radial load (**→ fig. 6**)
  - axial load (**→ fig. 7**)
  - combined (axial and radial) load (**→ fig. 8**)
- Type of load
  - dynamic load, i.e. there is relative sliding movement in the loaded bearing
  - static load, i.e. there is no relative movement in the loaded bearing
- Load conditions
  - constant load (**→ fig. 9**), i.e. the direction in which the load is applied does not change and the same part of the bearing (loaded zone) is always subjected to the load
  - alternating load (**→ fig. 10**), i.e. change of load direction so that zones at opposite positions in the bearing are alternately loaded and unloaded

## Equivalent dynamic bearing load

The load can be inserted directly into the equation for the specific bearing load  $p$  (**→ page 10**), if the magnitude of the load is constant and if the load acting on:


- Radial spherical plain bearings is purely radial
- Rod ends is purely radial and in the direction of the shank axis

In all other cases it is necessary to calculate the equivalent dynamic bearing load  $P$ . If the magnitude of the load is not constant, use the equation provided in the section “Variable load and sliding velocity” in the main catalog for spherical plain bearings and rod ends.

Radial spherical plain bearings can accommodate a certain magnitude of axial load  $F_a$  in addition to a simultaneously acting radial load  $F_r$  (**→ fig. 8**). When the resultant load is constant in magnitude, the equivalent dynamic bearing load can be calculated using

Diagram 4

Factor  $y$  for combined loading for radial spherical plain bearings

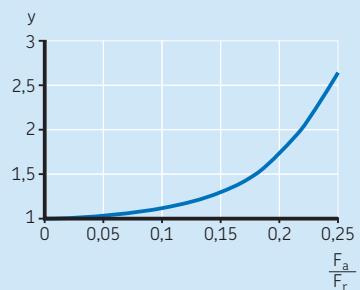

$$P = y F_r$$

where

$P$  = equivalent dynamic bearing load [kN]

$F_r$  = radial component of the load [kN]

$y$  = load factor that depends on the ratio of the axial to the radial load  $F_a/F_r$  (**→ diagram 4**)

Fig. 6

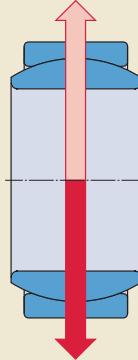


Fig. 7


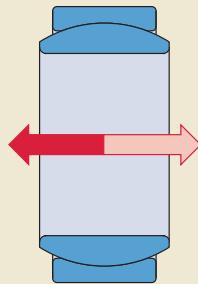


Fig. 8

Combined load

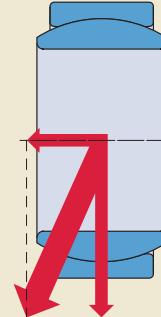

## Equivalent static bearing load

If spherical plain bearings and rod ends are subjected to static loads, or very slight alignment movements, then the permissible load is not limited by wear, but by the strength of the sliding contact layer or the strength of the rod end housing.

If the actual load is a combined load, then an equivalent static bearing load must be calculated. For radial spherical plain bearings, it can be calculated using

$$P_0 = y F_r$$

where

$P_0$  = equivalent static bearing load [kN]

$F_r$  = radial component of the load [kN]

$y$  = load factor that depends on the ratio of the axial to the radial load

$F_a/F_r$  ( $\rightarrow$  diagram 4)

## Permissible loads for rod ends

Rod ends are primarily intended for the support of radial loads acting in the direction of the shank axis. If loads act at angles to the shank axis ( $\rightarrow$  fig. 11), the maximum permissible load is reduced, as additional bending stresses occur in the shank. Under these conditions, consider the design and material used for the rod end housing ( $\rightarrow$  table 7, page 17).

The load acting perpendicular to the direction of the shank axis should never exceed the value of 0,1  $C_0$ . If heavier loads are involved, a larger rod end should be selected.

The maximum permissible load for a rod end in the direction of the shank axis can be calculated using

$$P_{\text{perm}} = C_0 b_2 b_6$$

where

$P_{\text{perm}}$  = maximum permissible load [kN]

$C_0$  = static load rating [kN]

$b_2$  = 1 for SKF Explorer steel/steel rod ends, maximum allowable temperature 110 °C

$b_6$  = factor for the type of load ( $\rightarrow$  table 2)


Table 2

### Factor $b_6$ for rod end load type

Constant



Pulsating magnitude (single direction)



Alternating direction




Fig. 9

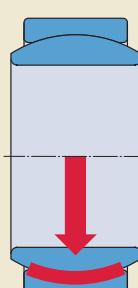


Fig. 9

Fig. 10


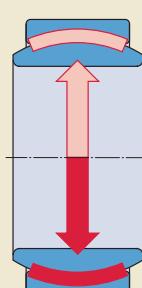


Fig. 11

Fig. 11

Rod end under combined load

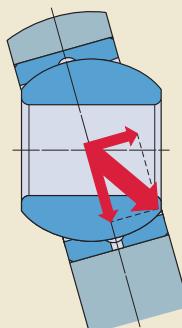

# Selection of bearing size

## Requisite bearing size

To determine the requisite size of a spherical plain bearing or rod end, it is necessary to know the requisite rating life for the application. This depends on the type of machine, the operating conditions and the demands regarding operational reliability. The following steps can be used to determine requisite bearing size:

- 1 Use, as a guideline, a value of 2 for the load ratio C/P for spherical plain bearings and rod ends to obtain a requisite basic dynamic load rating C. Compare this value with the basic dynamic load rating of the bearings listed in the product tables.
- 2 Use the pv diagram (**→ diagram 5**) to check if the selected SKF Explorer steel/steel plain bearing or rod end can be used under the actual load and sliding velocity conditions. The specific bearing load p and the sliding velocity v needed to perform this check can be calculated as explained in the following sections:

- 2.1** If the pv diagram indicates that the basic rating life equation can be used, proceed to step 3.
- 2.2** If the pv diagram shows that the pv range is exceeded, select a bearing with a higher load carrying capacity.

**3** Calculate the basic rating life (**→ page 12**) and proceed as follows:

- 3.1** If the calculated rating life is shorter than the requisite rating life, a larger bearing or rod end should be selected and the calculation repeated.
- 3.2** If the calculated rating life is larger than the requisite rating life, the bearing or rod end can be selected for the application.

The bearing or rod end size is often determined by the dimensions of the associated components. In these cases, check the pv diagram to determine if the product is suitable.

## Specific bearing load

The magnitude of the specific bearing load can be calculated using

$$p = K \frac{P}{C}$$

where

p = specific bearing load [ $\text{N/mm}^2$ ]

K = specific load factor for SKF Explorer

$$K = 150 \text{ [N/mm}^2\text{]}$$

P = equivalent dynamic bearing load [kN]

C = basic dynamic load rating [kN]

## Mean sliding velocity

The mean sliding velocity for constant movement can be calculated using

$$v = 5,82 \times 10^{-7} d_k \beta f$$

where

v = mean sliding velocity [m/s]

When the operation is intermittent (not continuous), the mean sliding velocity should be calculated for a cycle of operation

$$d_k = \text{inner ring sphere diameter [mm]}$$

$\beta$  = half the angle of oscillation

(**→ fig. 5, page 7**), degrees [ $^\circ$ ], for rotation  $\beta = 90^\circ$

$$f = \text{frequency of oscillation } [\text{min}^{-1}], \text{ or rotational speed } [\text{min}^{-1}]$$

For intermittent movement, the angle of oscillation is usually given in units of time. In this case the mean sliding velocity can be calculated using

$$v = 8,73 \times 10^{-6} d_k \left( \frac{4\beta}{t} \right)$$


where

$\beta$  = half the angle of oscillation [ $^\circ$ ] (**→ fig. 5, page 7**)

t = time taken to pass through complete oscillation [s]

Diagram 5

pv diagram for SKF Explorer steel/steel plain bearings

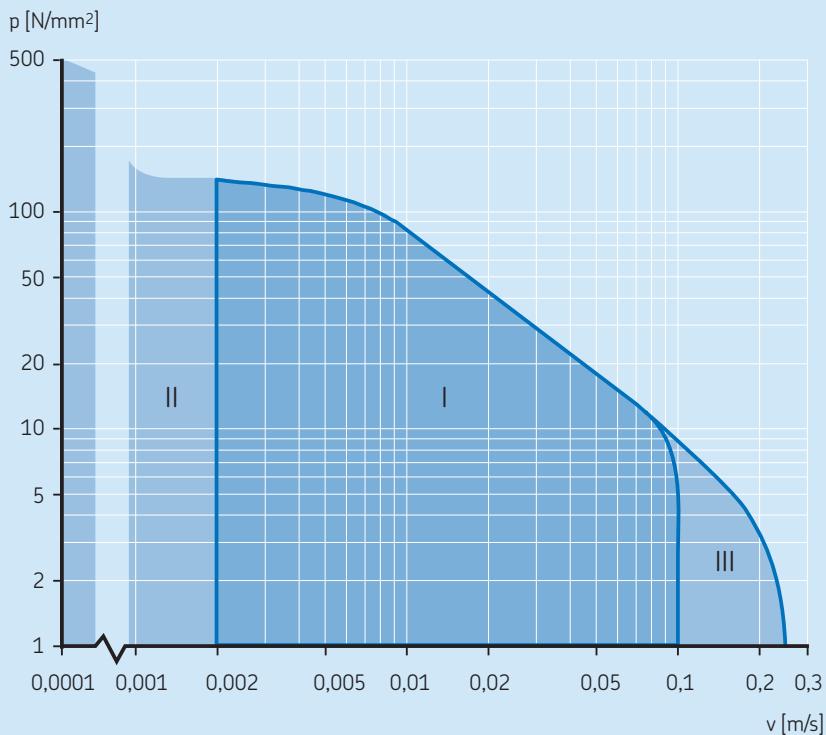

**pv operating ranges**

- I** Range where rating life equation is valid
- II** Quasi-static range; before using the rating life equation, contact the SKF application engineering service
- III** Possible range of use, e.g. with very good heat dissipation; before using the rating life equation, contact the SKF application engineering service for additional information

# Selection of bearing size

## Basic rating life calculation

The basic rating life for SKF Explorer steel/steel plain bearings can be calculated using

$$G_h = b_1 b_2 b_3 b_5 \frac{5}{p^{0.6} \times v^{1.6}}$$

where

$G_h$  = basic rating life, operating hours [h]

$b_1$  = load condition factor

$b_1 = 1$  for constant direction load

$b_1 = 2$  for alternating direction load

$b_2$  = temperature factor ( $\rightarrow$  diagram 6)

$b_3$  = sliding factor ( $\rightarrow$  diagram 7)


$b_5$  = factor for angle of oscillation  
( $\rightarrow$  diagram 8)

$p$  = specific bearing load [ $N/mm^2$ ]  
(for values of  $p < 10 N/mm^2$  use  
 $p = 10 N/mm^2$ )

$v$  = mean sliding velocity [m/s]

Diagram 6

Temperature factor  $b_2$  for SKF Explorer steel/steel plain bearings

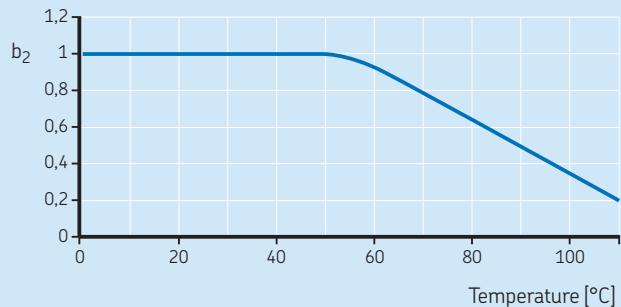

If  $-45^\circ C < T < 0^\circ C$ , the value of  $b_2$  for  $T = 0^\circ C$  should be used.

Diagram 7

Sliding factor  $b_3$  for SKF Explorer steel/steel plain bearings


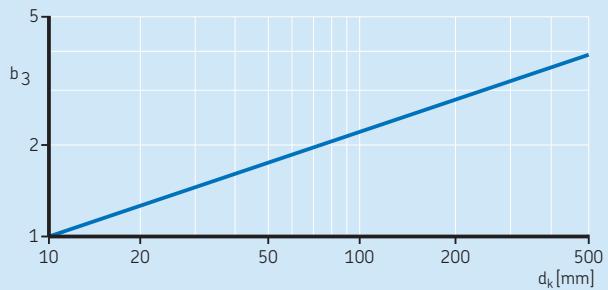


Diagram 8

Factor  $b_5$  for angle of oscillation for SKF Explorer steel/steel plain bearings

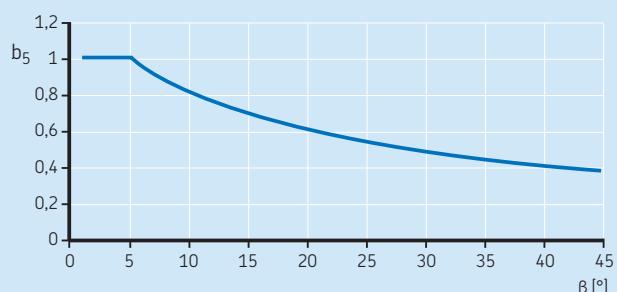

If  $\beta > 45^\circ$ , the value of  $b_5$  for  $\beta = 45^\circ$  should be used.

# Calculation examples

The following calculation example illustrates the methods used to determine the requisite bearing size or the basic rating life for an SKF Explorer steel/steel spherical plain bearing.

## Linkages of a flap opening system

### Given data:

Purely radial load that alternates direction

$F_r = 16 \text{ kN}$

Half angle of oscillation:  $\beta = 5^\circ$  ( $\rightarrow$  fig. 5, page 7)

Frequency of oscillation:  $f = 40 \text{ min}^{-1}$

Maximum operating temperature:  $+80^\circ\text{C}$

### Requirements:

The bearing must have a basic rating life of 7 000 h and no relubrication should be done.

### Calculation and selection:

Because the bearing needs to accommodate alternating loads in an application with a small oscillation angle and without relubrication, an SKF Explorer steel/steel plain bearing is chosen.

If, for the first check, a guideline value of 2 is used for the load ratio C/P ( $\rightarrow$  page 10), the required basic dynamic load rating C for the bearing is

$$C = 2 P = 32 \text{ kN}$$

Bearing GE 20 ESX-2LS, with a dynamic load rating  $C = 44 \text{ kN}$  and a sphere diameter  $d_k = 29 \text{ mm}$ , is chosen from the product table on page 18.

To check the suitability of the bearing using the pv diagram ( $\rightarrow$  diagram 5, page 11), calculate the specific bearing load using  $K = 150 \text{ N/mm}^2$  ( $\rightarrow$  table 1, page 7).

$$p = K \frac{P}{C} = 150 \times \frac{16}{44} = 54,5 \text{ N/mm}^2$$

and the sliding velocity  $v$  (page 10) using  $d_k = 29 \text{ mm}$ ,  $\beta = 5^\circ$  and  $f = 40 \text{ min}^{-1}$

$$\begin{aligned} v &= 5,82 \times 10^{-7} d_k \beta f \\ &= 5,82 \times 10^{-7} \times 29 \times 5 \times 40 \\ &= 0,0034 \text{ m/s} \end{aligned}$$

The values for  $p$  and  $v$  lie within the permissible operating range I of the pv diagram ( $\rightarrow$  diagram 5, page 11), for SKF Explorer steel/steel plain bearings. To calculate the basic rating life, the values that apply are

$$b_1 = 2 \text{ (alternating direction load, page 12)}$$

$$b_2 = 0,64 \text{ (from diagram 6, for } T = 80^\circ\text{C)}$$

$$b_3 = 1,45 \text{ (from diagram 7, for } d_k = 29 \text{ mm)}$$

$$b_5 = 1,0 \text{ (from diagram 8, for } \beta = 5^\circ)$$

$$p = 54,5 \text{ N/mm}^2$$

$$v = 0,0034 \text{ m/s}$$

$$G_h = b_1 b_2 b_3 b_5 \frac{5}{p^{0,6} \times v^{1,6}}$$

$$= 2 \times 0,64 \times 1,45 \times 1 \times \frac{5}{54,5^{0,6} \times 0,0034^{1,6}}$$

$$\approx 7500 \text{ operating hours}$$

Therefore, the selected bearing GE 20 ESX-2LS meets the requirements.

**NOTE:** The SKF Bearing Calculator incorporates programmes to perform these and many other calculations quickly and accurately. These programmes can be run any number of times to find the best possible solution. The SKF Bearing Calculator is available online at [skf.com/bearingcalculator](http://skf.com/bearingcalculator).

# Mounting and handling instructions

SKF Explorer steel/steel plain bearings should not be lubricated\*. These bearings are lubricated at the factory under well-controlled conditions.

Introducing a foreign grease will only reduce the effectiveness of the tribological system. When mounting, do not swivel the bearing to the point where grease will be displaced from the bearing.

Skill and cleanliness when mounting are necessary if spherical plain bearings and rod ends are to achieve maximum service life and not fail prematurely.

Bearings and rod ends should only be removed from their packages immediately prior to mounting so that they do not become contaminated. All associated components should be clean and free of any burrs.

When heating the bearing for mounting, do not exceed the temperature limit of 110 °C.

SKF Explorer steel/steel plain bearings come with a notched and fractured outer ring. It is beneficial for service life that the joint is positioned at 90° to the direction of the load (→ **fig. 12**).

Also make sure to check each associated component for dimensional accuracy before the installation process is started. Recommended fits for shaft and housing can be found in **tables 3** and **4**.


## Further information

Please refer to the latest catalog for SKF spherical plain bearings and rod ends or to [skf.com](http://skf.com) for more general information in regards to:

- Variable load and motion
- Design of bearing arrangements
- Mounting instructions

Fig. 12

Plane of fracture or split and main direction of load

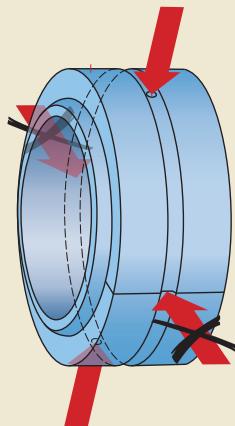

\* The bearings still have lubrication holes for manufacturing reasons. Do not apply grease to the bearing. Greasing or re-greasing the bearings will compromise the maintenance-free operation of the bearings and void the service life commitment provided by SKF with the original bearing.

**Table 3****Shaft fits<sup>1)</sup>**

<b>Operating conditions</b>	<b>Tolerance classes</b>
-----------------------------	--------------------------

**Radial spherical plain bearings**

Loads of all kinds, interference fit

m6 $\oplus$  (n6 $\ominus$ )

Loads of all kinds, clearance or transition fit

h6 $\ominus$  (hardened shaft)

The tolerance classes in brackets should be selected for very heavily loaded bearings. If selected, be sure that the residual operating clearance is sufficient for proper performance of the bearing or whether a bearing with larger internal clearance must be used.

**Table 4****Housing fits<sup>1)</sup>**

<b>Operating conditions</b>	<b>Tolerance classes</b>
-----------------------------	--------------------------

**Radial spherical plain bearings**

Light loads, axial displacement required

H7 $\ominus$ 

Heavy loads

M7 $\ominus$  (N7 $\ominus$ )

Light alloy housings

N7 $\ominus$ 

The tolerance classes in brackets should be selected for very heavily loaded bearings. If selected, be sure that the residual operating clearance of the radial bearing is sufficient for proper performance or whether a bearing with larger internal clearance must be used.

<sup>1)</sup>All ISO tolerance classes are valid with the envelope requirement in accordance with ISO 14405-1.

# Bearing data – general

## The assortment

SKF Explorer steel/steel plain bearings are available in the GE, GEH, GEM and GEZ, GEZH and GEZM series. The sliding surfaces are treated further to improve wear and corrosion resistance. The outer ring is intentionally fractured to allow for the inner ring to be inserted. The bearings are non-separable.

Rod ends of series SI(A) and SA(A) can also be equipped with these spherical plain bearings.

## Dimensions

Boundary dimensions of metric SKF Explorer steel/steel plain bearings are in accordance with ISO 12240-1:1998

- GE .. ESX-2LS and GEH .. ESX-2LS series
- GEM .. ESX-2LS series except for the inner ring

Boundary dimensions of inch SKF Explorer steel/steel plain bearings are in accordance with ANSI/ABMA Std. 22.2-1988

- GEZ .. ESX-2LS and GEZH .. ESX-2LS series
- GEZM .. ESX-2LS series except for the inner ring

The dimensions of SKF rod ends are in accordance with the standards SA(A), SI(A) ISO 12240-4:1998 dimension series E, EH.

Male and female threads of SKF rod ends are in accordance with ISO 965-1:1998.

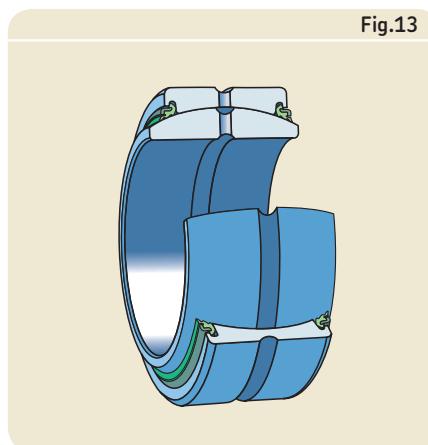


Fig.13

### GE .. ESX-2LS

Metric radial spherical plain bearings.  
Range: 20 to 300 mm bore.

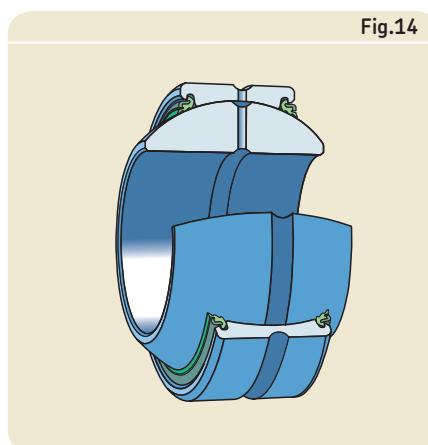


Fig.14

### GEH .. ESX-2LS

Metric radial spherical plain bearings as GE .. ESX-2LS, but with wider inner ring and larger outside diameter.  
Range: 20 to 120 mm bore.

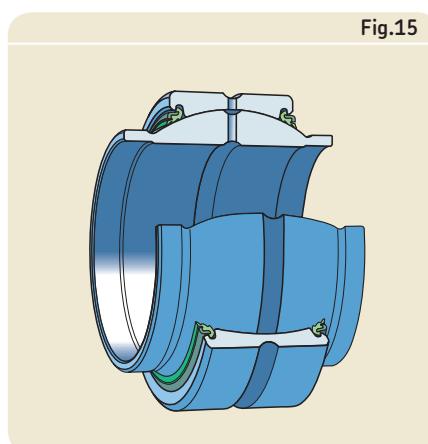


Fig.15

### GEM .. ESX-2LS

Metric radial spherical plain bearings, as GE .. ESX-2LS, but with a cylindrical extension on both sides of the inner ring.  
Range: 20 to 80 mm bore.

### GEZM .. ESX-2LS

Inch size radial spherical plain bearings, as GEZ .. ESX-2LS, but with a cylindrical extension on both sides of the inner ring.  
Range: 1 to 6 inch bore.

## Tolerances

SKF metric radial spherical plain bearings are manufactured to tolerances in accordance with ISO 12240-1:1998. SKF inch radial spherical plain bearings are manufactured to tolerances in accordance with ANSI/ABMA Std. 22.2-1988.

## Radial internal clearance

SKF Explorer steel/steel radial plain bearings are produced with normal radial internal clearance as standard. The actual values are listed in **tables 5** and **6**.

## Materials

SKF Explorer steel/steel plain bearings are made of high grade carbon chromium steel that has been hardened, ground and phosphated. They are equipped with two triple-lip heavy-duty contact seals made of acrylonitrile-butadiene rubber (NBR). SKF Explorer rod end housings are made of the materials listed in **table 7**.

The rod end housings are equipped with lubrication holes due to manufacturing reasons, which are plugged to avoid contamination and relubrication.

## Permissible operating temperature range

SKF Explorer steel/steel radial plain bearings and rod ends have a permissible operating temperature range of -45 to +110 °C.

Table 5 Radial internal clearance for SKF Explorer steel/steel spherical plain bearings, metric sizes				
Bore diameter d over	Radial internal clearance			
	incl.	Normal min	max	
<b>mm</b>				
-	12	32	68	
12	20	40	82	
20	35	50	100	
35	60	60	120	
	60	90	142	
	90	140	165	
	140	200	192	
	200	240	110	214
	240	300	125	239

Bearings in the GEH series, with a bore diameter  $d = 20, 35, 60$  and  $90$  mm, have a radial internal clearance range corresponding to the next larger diameter range.


Table 6 Radial internal clearance for SKF Explorer steel/steel spherical plain bearings, inch sizes				
Bore diameter d over	Radial internal clearance			
	incl.	Normal min	max	
<b>mm</b>				
-	0,625	50	150	
0,625	2	80	180	
2	3	100	200	
3	6	130	230	

Table 7 Housing materials for rod ends			
Series	Size	Material	Material No.
SA(A), SI (A)	6 to 80	Heat treatable steel C45V zinc coated	1.0503


# SKF Explorer steel/steel plain bearings

Radial spherical plain bearings, metric sizes

d 20 – 120 mm

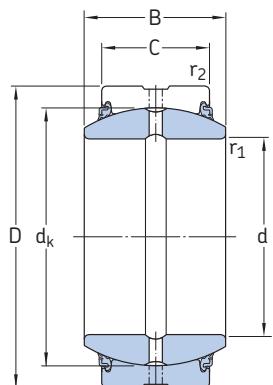

GE .. ESX-2LS

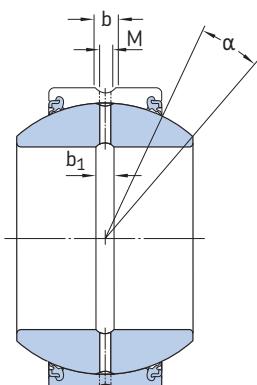


GEH .. ESX-2LS

Principal dimensions				Angle of tilt <sup>1)</sup>	Basic load ratings	Mass	Designation
d	D	B	C	α	dynamic C	static $C_0$	
mm				°	kN	kg	–
20	35 42	16 25	12 16	9 17	44 72	146 240	0,065 0,16
25	42 47	20 28	16 18	7 17	72 93	240 310	0,12 0,2
30	47 55	22 32	18 20	6 17	93 120	310 400	0,16 0,35
35	55 62	25 35	20 22	6 15	120 150	400 500	0,23 0,47
40	62 68	28 40	22 25	6 17	150 190	500 640	0,32 0,61
45	68 75	32 43	25 28	7 14	190 236	640 780	0,46 0,8
50	75 90	35 56	28 36	6 17	236 365	780 1 220	0,56 1,6
60	90 105	44 63	36 40	6 17	365 465	1 220 1 560	1,1 2,4
70	105 120	49 70	40 45	6 16	465 600	1 560 2 000	1,55 3,4
80	120 130	55 75	45 50	5 14	600 735	2 000 2 450	2,3 4,1
90	130 150	60 85	50 55	5 15	735 915	2 450 3 050	2,75 6,3
100	150 160	70 85	55 55	6 13	915 980	3 050 3 250	4,4 6,8
110	160 180	70 100	55 70	6 12	980 1 430	3 250 4 750	4,8 11
120	180 210	85 115	70 70	6 16	1 430 1 600	4 750 5 400	8,25 15
							GE 120 ESX-2LS GEH 120 ESX-2LS <sup>2)</sup>

<sup>1)</sup> To fully utilize the angle of tilt, the shaft shoulder should not be larger than  $d_a$  max

<sup>2)</sup> Seal design may vary

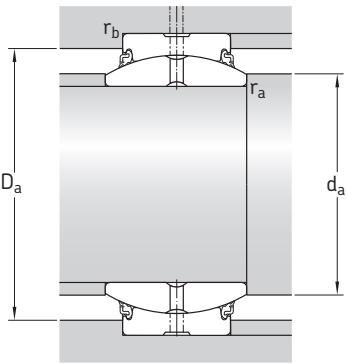

**Dimensions**
**Abutment and fillet dimensions**

d	d_k	b, b <sub>1</sub>	M	r <sub>1</sub> min.	r <sub>2</sub> min.	d <sub>a</sub> min.	d <sub>a</sub> max.	D <sub>a</sub> min.	D <sub>a</sub> max.	r <sub>a</sub> max.	r <sub>b</sub> max.
mm											
20	29 35,5	3,1 3,1	2 2	0,3 0,3	0,3 0,6	22,1 22,7	24,2 25,2	30,9 36,9	33,2 39,2	0,3 0,3	0,3 0,6
25	35,5 40,7	3,1 3,1	2 2	0,6 0,6	0,6 0,6	28,2 28,6	29,3 29,5	36,9 41,3	39,2 44	0,6 0,6	0,6 0,6
30	40,7 47	3,1 3,9	2 2,5	0,6 0,6	0,6 1	33,3 33,7	34,2 34,4	41,3 48,5	44 50,9	0,6 0,6	0,6 1
35	47 53	3,9 3,9	2,5 2,5	0,6 0,6	1 1	38,5 38,8	39,8 39,8	48,5 54,5	50,9 57,8	0,6 0,6	1 1
40	53 60	3,9 4,6	2,5 3	0,6 0,6	1 1	43,6 44,1	45 44,7	54,5 61	57,8 63,6	0,6 0,6	1 1
45	60 66	4,6 4,6	3 3	0,6 0,6	1 1	49,4 49,8	50,8 50,1	61 66,2	63,6 70,5	0,6 0,6	1 1
50	66 80	4,6 6,2	3 4	0,6 0,6	1 1	54,6 55,8	56 57,1	66,2 79,7	70,5 84,2	0,6 0,6	1 1
60	80 92	6,2 7,7	4 4	1 1	1 1	66,4 67	66,8 67	79,7 92	84,2 99	1 1	1 1
70	92 105	7,7 7,7	4 4	1 1	1 1	76,7 77,5	77,9 78,3	92 104,4	99 113,8	1 1	1 1
80	105 115	7,7 9,5	4 5	1 1	1 1	87,1 87,2	89,4 87,2	104,4 112,9	113,8 123,5	1 1	1 1
90	115 130	9,5 11,3	5 5	1 1	1 1	97,4 98,2	98,1 98,4	112,9 131	123,5 143,2	1 1	1 1
100	130 140	11,3 11,5	5 5	1 1	1 1	107,8 108,1	109,5 111,2	131 141,5	143,2 153,3	1 1	1 1
110	140 160	11,5 13,5	5 6	1 1	1 1	118 119,5	121 124,5	141,5 157,5	153 172	1 1	1 1
120	160 180	13,5 13,5	6 6	1 1	1 1	129,5 130	135,5 138,5	157,5 180	172 202,5	1 1	1 1


# SKF Explorer steel/steel plain bearings

Radial spherical plain bearings, metric sizes

d 140 – 300 mm

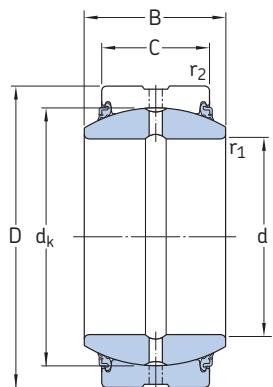

GE .. ESX-2LS

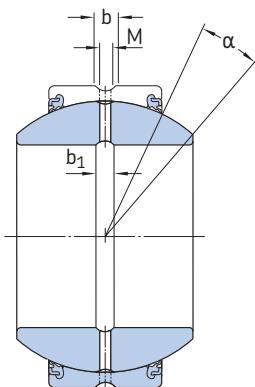


GEH .. ESX-2LS

Principal dimensions				Angle of tilt <sup>1)</sup>	Basic load ratings dynamic	static	Mass	Designation
d	D	B	C	α	C	C <sub>0</sub>	kg	–
mm				°	kN			
<b>140</b>	210	90	70	7	1 600	5 400	11	<b>GE 140 ESX-2LS<sup>2)</sup></b>
<b>160</b>	230	105	80	8	2 040	6 800	14	<b>GE 160 ESX-2LS<sup>2)</sup></b>
<b>180</b>	260	105	80	6	2 280	7 650	18,5	<b>GE 180 ESX-2LS<sup>2)</sup></b>
<b>200</b>	290	130	100	7	3 200	10 600	28	<b>GE 200 ESX-2LS<sup>2)</sup></b>
<b>220</b>	320	135	100	8	3 550	11 600	35,5	<b>GE 220 ESX-2LS<sup>2)</sup></b>
<b>240</b>	340	140	100	8	3 800	12 700	40	<b>GE 240 ESX-2LS<sup>2)</sup></b>
<b>260</b>	370	150	110	7	4 550	15 300	51,5	<b>GE 260 ESX-2LS<sup>2)</sup></b>
<b>280</b>	400	155	120	6	5 400	18 000	65	<b>GE 280 ESX-2LS<sup>2)</sup></b>
<b>300</b>	430	165	120	7	5 700	19 000	78,5	<b>GE 300 ESX-2LS<sup>2)</sup></b>

<sup>1)</sup> To fully utilize the angle of tilt, the shaft shoulder should not be larger than  $d_a$  max

<sup>2)</sup> Seal design may vary

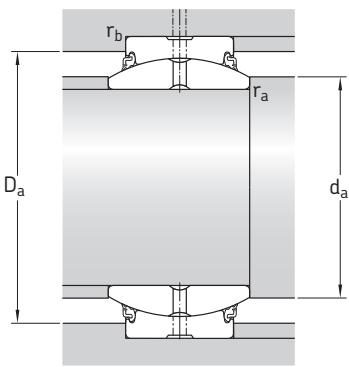

#### Dimensions


#### Abutment and fillet dimensions

d	d_k	b, b <sub>1</sub>	M	r <sub>1</sub> min.	r <sub>2</sub> min.	d <sub>a</sub> min.	d <sub>a</sub> max.	D <sub>a</sub> min.	D <sub>a</sub> max.	r <sub>a</sub> max.	r <sub>b</sub> max.
mm											
<b>140</b>	180	13,5	6	1	1	149	155,5	180	202,5	1	1
<b>160</b>	200	13,5	6	1	1	169,5	170	197	222	1	1
<b>180</b>	225	13,5	6	1,1	1,1	191	199	224,5	250,5	1	1
<b>200</b>	250	15,5	7	1,1	1,1	212,5	213,5	244,5	279,5	1	1
<b>220</b>	275	15,5	7	1,1	1,1	232,5	239,5	271	309,5	1	1
<b>240</b>	300	15,5	7	1,1	1,1	252,5	265	298	329,5	1	1
<b>260</b>	325	15,5	7	1,1	1,1	273	288	321,5	359	1	1
<b>280</b>	350	15,5	7	1,1	1,1	294	313,5	344,5	388,5	1	1
<b>300</b>	375	15,5	7	1,1	1,1	314	336,5	371	418,5	1	1


# SKF Explorer steel/steel plain bearings

Radial spherical plain bearings, inch sizes

d 1 – 6 in.

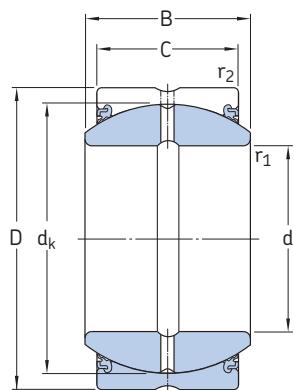


GEZ .. ESX-2LS

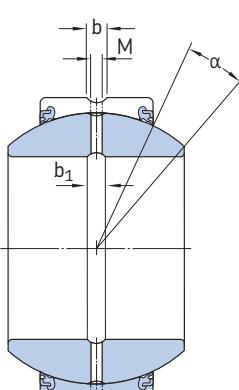

GEZH .. ESX-2LS

Principal dimensions				Angle of tilt <sup>1)</sup>	Basic load ratings	Mass	Designation	
d	D	B	C	α	C dynamic	C <sub>0</sub> static		
1 25,4	1.6250 41,275	0.875 22,225	0.750 19,05	6	18 600 83	37 350 166	0.26 0,12	GEZ 100 ESX-2LS
1.25 31,75	2.0000 50,8	1.093 27,762	0.937 23,8	6	29 000 129	58 500 260	0.51 0,23	GEZ 104 ESX-2LS
	2.4375 61,913	1.390 35,306	1.125 28,575	8	41 500 186	84 380 375	1.19 0,54	GEZH 104 ESX-2LS
1.375 34,925	2.1875 55,563	1.187 30,15	1.031 26,187	5	35 100 156	69 750 310	0.77 0,35	GEZ 106 ESX-2LS
1.5 38,1	2.4375 61,913	1.312 33,325	1.125 28,575	6	41 500 186	84 380 375	0.93 0,42	GEZ 108 ESX-2LS
	2.8125 71,438	1.580 40,132	1.312 33,325	7	57 000 255	114 750 510	1.75 0,79	GEZH 108 ESX-2LS
1.75 44,45	2.8125 71,438	1.531 38,887	1.312 33,325	6	57 000 255	114 750 510	1.40 0,64	GEZ 112 ESX-2LS
	3.1875 80,963	1.820 44,45	1.500 38,1	7	75 000 335	150 750 670	2.50 0,93	GEZH 112 ESX-2LS
2 50,8	3.1875 80,963	1.750 44,45	1.500 38,1	6	75 000 335	150 750 670	2.05 0,93	GEZ 200 ESX-2LS
	3.5625 90,488	2.070 52,578	1.687 42,85	8	95 000 425	191 250 850	3.50 1,6	GEZH 200 ESX-2LS
2.25 57,15	3.5625 90,488	1.969 50,013	1.687 42,85	6	95 000 425	191 250 850	2.85 1,3	GEZ 204 ESX-2LS
	3.9375 100,013	2.318 58,877	1.875 47,625	8	116 000 520	234 000 1040	4.65 2,1	GEZH 204 ESX-2LS
2.5 63,5	3.9375 100,013	2.187 55,55	1.875 47,625	6	116 000 520	234 000 1040	4.10 1,85	GEZ 208 ESX-2LS
	4.3750 111,125	2.545 61,112	2.062 52,375	8	140 000 630	285 750 1 270	6.30 2,4	GEZH 208 ESX-2LS
2.75 69,85	4.3750 111,125	2.790 61,112	2.250 52,375	6	140 000 630	285 750 1 270	5.30 2,4	GEZ 212 ESX-2LS
	4.7500 120,65	64,643 70,866	57,15	8	170 000 750	337 500 1 500	8.05 3,65	GEZH 212 ESX-2LS

<sup>1)</sup> To fully utilize the angle of tilt, the shaft shoulder should not be larger than  $d_{a\max}$

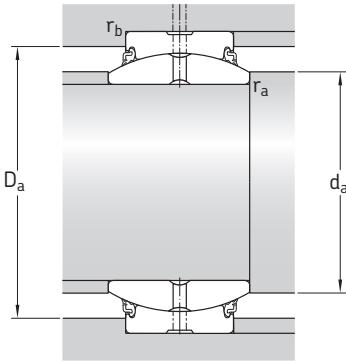

Dimensions							Abutment and fillet dimensions						
d	d_k	b	b_1	M	r_1 <sup>1)</sup> min.	r_2 <sup>2)</sup> min.	d_a min.	d_a max.	D_a min.	D_a max.	r_a max.	r_b max	
in./mm							in./mm						
<b>1</b> 25,4	1,4370 36,5	0,126 3,2	0,118 3	0,098 2,5	0,012 0,3	0,039 1	1,08 27,5	1,14 29	1,39 35,2	1,48 37,7	0,012 0,3	0,039 1	
<b>1,25</b> 31,75	1,7950 45,593	0,189 4,8	0,197 5	0,157 4	0,024 0,6	0,039 1	1,37 34,8	1,43 36,2	1,76 44,8	1,85 47	0,024 0,6	0,039 1	
	2,1550 54,737	0,189 4,8	0,197 5	0,157 4	0,039 1	0,039 1	1,43 36,2	1,65 41,8	2,06 52,3	2,28 58	0,039 1	0,039 1	
	1,9370 49,2	0,189 4,8	0,197 5	0,157 4	0,024 0,6	0,039 1	1,50 38,1	1,53 38,9	1,85 47,1	2,04 51,7	0,024 0,6	0,039 1	
	2,1550 54,737	0,189 4,8	0,197 5	0,157 4	0,024 0,6	0,039 1	1,63 41,4	1,71 43,4	2,06 52,3	2,28 58	0,024 0,6	0,039 1	
<b>1,375</b> 34,925	2,5150 63,881	0,189 4,8	0,197 5	0,157 4	0,039 1	0,039 1	1,69 42,8	1,96 49,7	2,41 61,3	2,65 67,4	0,039 1	0,039 1	
	2,5150 2,8750 73,025	0,189 0,189 4,8	0,197 0,197 5	0,157 0,157 4	0,039 0,059 1	0,039 0,039 1	1,91 50,9	2,00 56,5	2,41 72,4	2,65 75,9	0,024 0,6	0,039 1	
	2,5150 2,8750 73,025	0,189 0,189 4,8	0,197 0,197 5	0,157 0,157 4	0,024 0,059 1,5	0,039 0,039 1	2,00 50,9	2,41 56,5	2,65 72,4	2,85 75,9	0,024 0,6	0,039 1	
	2,8750 73,025 3,2350 82,169	0,189 4,8 0,224 5,7	0,197 5 0,197 5	0,157 4 0,157 4	0,024 0,6 0,059 1,5	0,039 1 0,039 1	2,17 55,1	2,28 57,9	2,85 72,4	3,11 75,9	0,024 0,6	0,039 1	
<b>2</b> 50,8	3,2350 82,169	0,224 5,7	0,197 5	0,157 4	0,024 0,6	0,039 1	2,26 61,7	2,48 65,2	3,11 79	3,36 85,3	0,024 0,6	0,039 1	
	3,5900 91,186	0,354 9	0,315 8	0,256 6,5	0,059 0,6	0,039 1	2,52 64,1	2,74 69,6	3,43 87	3,73 94,7	0,059 1,5	0,039 1	
	3,5900 91,186	0,354 9	0,315 8	0,256 6,5	0,024 0,6	0,039 1	2,69 68,3	2,85 72,3	3,43 87	3,73 94,7	0,024 0,6	0,039 1	
	3,9500 100,33	0,354 9	0,315 8	0,256 6,5	0,079 2	0,039 1	2,83 72	3,02 76,7	3,78 96	4,16 105,7	0,079 2	0,039 1	
<b>2,75</b> 69,85	3,9500 100,33	0,354 9	0,315 8	0,256 6,5	0,024 0,6	0,039 1	2,95 74,9	3,13 79,6	3,78 96	4,16 105,7	0,024 0,6	0,039 1	
	4,3120 109,525	0,354 9	0,315 8	0,256 6,5	0,079 2	0,039 1	3,09 78,6	3,29 83,5	4,13 104,8	4,53 115	0,079 2	0,039 1	


<sup>1)</sup> Equal to maximum shaft fillet radius  $r_{a\max}$

<sup>2)</sup> Equal to maximum housing fillet radius  $r_{b\max}$


# SKF Explorer steel/steel plain bearings

Radial spherical plain bearings, inch sizes

d 1 – 6 in.

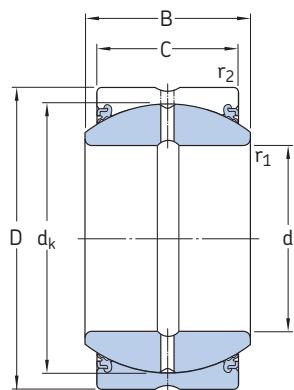


GEZ .. ESX-2LS

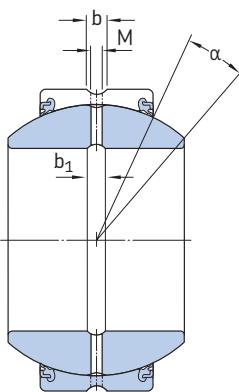

GEZH .. ESX-2LS

Principal dimensions				Angle of tilt <sup>1)</sup>	Basic load ratings dynamic	static	Mass	Designation
d	D	B	C	α	C	C <sub>0</sub>		
in./mm				°	lbf/kN	lb/kg	–	
3	4.7500 76,2	2.625 66,675	2.250 57,15	6	170 000 750	337 500 1 500	6.85 3,1	GEZ 300 ESX-2LS
	120,65				196 000	396 000	10.0	GEZH 300 ESX-2LS
	5.1250	3.022	2.437	8	880	1 760	4,55	
	130,175	76,759	61,9					
3.25	5.1250 82,55	2.844 130,175	2.437 61,9	6	196 000 880	396 000 1 760	8,40 3,8	GEZ 304 ESX-2LS
	130,175	72,238			228 000	459 000	12,4	GEZH 304 ESX-2LS
	5.5000	3.265	2.625	9	1 020	2 040	5,6	
	139,7	82,931	66,675					
3.5	5.5000 88,9	3.062 77,775	2.625 66,675	6	228 000 1 020	459 000 2040	10,6 4,8	GEZ 308 ESX-2LS
	139,7	77,775			265 000	531 000	15,0	GEZH 308 ESX-2LS
	5.8750	3.560	2.812	9	1 180	2360	6,8	
	149,225	90,424	71,425					
3.75	5.8750 95,25	3.281 83,337	2.812 71,425	6	265 000 1 180	531 000 2 360	12,8 5,8	GEZ 312 ESX-2LS
	149,225	83,337			305 000	596 250	17,9	GEZH 312 ESX-2LS
	6.2500	3.738	3.000	9	1 340	2 650	8,1	
	158,75	94,945	76,2					
4	6.2500 101,6	3.500 88,9	3.000 76,2	6	305 000 1 340	596 250 2 650	15,5 7	GEZ 400 ESX-2LS
	158,75	88,9			375 000	765 000	30,0	GEZH 400 ESX-2LS
	7.0000	4.225	3.375	9	1 700	3 400	13,5	
	177,8	107,315	85,725					
4.5	7.0000 114,3	3.937 100	3.375 85,725	6	375 000 1 700	765 000 3 400	21,5 9,8	GEZ 408 ESX-2LS
	177,8	100			465 000	933 750	36,0	GEZH 408 ESX-2LS
	7.7500	4.690	3.750	9	2 080	4 150	16,5	
	196,85	119,126	95,25					
4.75	7.3750 120,65	4.156 105,562	3.562 90,475	6	425 000 1 900	843 750 3 750	25,5 11,5	GEZ 412 ESX-2LS
	187,325							
5	7.7500 127	4.375 111,125	3.750 95,25	6	465 000 2 080	933 750 4 150	30,0 13,5	GEZ 500 ESX-2LS
	196,85							
5.5	8.7500 139,7	4.950 125,73	4.125 104,775	7	585 000 2 600	1 170 000 5 200	45,0 20,5	GEZH 508 ESX-2LS
	222,25							
6	8.7500 152,4	4.750 120,65	4.125 104,775	5	585 000 2 600	1 170 000 5 200	38,5 17,5	GEZ 600 ESX-2LS
	222,25							

<sup>1)</sup> To fully utilize the angle of tilt, the shaft shoulder should not be made larger than  $d_{a\max}$

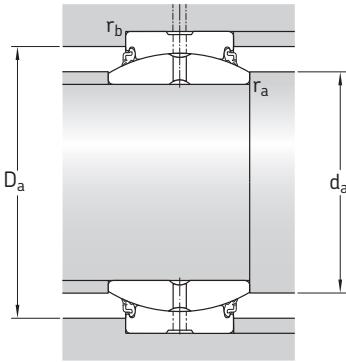

#### Dimensions

#### Abutment and fillet dimensions

d	d_k	b	b <sub>1</sub>	M	r <sub>1</sub> <sup>1)</sup> min.	r <sub>2</sub> <sup>2)</sup> min.	d <sub>a</sub> min.	d <sub>a</sub> max.	D <sub>a</sub> min.	D <sub>a</sub> max.	r <sub>a</sub> max.	r <sub>b</sub> max.
in./mm												
3 76,2	4.3120 109,525	0.354 9	0.315 8	0.256 6,5	0,024 0,6	0,039 1	3,20 81,4	3,42 86,9	4,13 104,8	4,53 115	0,024 0,6	0,039 1
	4,6750 118,745	0,366 9,3	0,315 8	0,256 6,5	0,079 2	0,039 1	3,35 85,1	3,57 90,6	4,50 114,2	4,90 124,4	0,079 2	0,039 1
	5,0400 128,016	0,413 10,5	0,315 8	0,256 6,5	0,079 2	0,039 1	3,65 92,7	3,84 97,5	4,83 122,8	5,27 133,8	0,079 2	0,039 1
3,25 82,55	4,6750 118,745	0,366 9,3	0,315 8	0,256 6,5	0,024 0,6	0,039 1	3,46 88	3,71 94,2	4,50 114,2	4,90 124,4	0,024 0,6	0,039 1
	5,0400 128,016	0,413 10,5	0,315 8	0,256 6,5	0,079 2	0,039 1	3,65 92,7	3,84 97,5	4,83 122,8	5,27 133,8	0,079 2	0,039 1
	5,3900 136,906	0,413 10,5	0,315 8	0,256 6,5	0,024 0,6	0,039 1	3,72 94,6	4,00 101,7	4,83 122,8	5,27 133,8	0,024 0,6	0,039 1
3,5 88,9	5,0400 128,016	0,413 10,5	0,315 8	0,256 6,5	0,079 2	0,039 1	3,91 99,3	4,04 102,5	5,17 102,5	5,63 131,4	0,079 2	0,039 1
	5,3900 136,906	0,413 10,5	0,315 8	0,256 6,5	0,024 0,6	0,039 1	3,98 101,2	4,28 108,6	5,17 108,6	5,63 131,4	0,024 0,6	0,039 1
	5,7500 146,05	0,413 10,5	0,394 10	0,315 8	0,079 2	0,039 1	4,17 105,8	4,37 110,9	5,49 110,9	6,00 139,5	0,079 2	0,039 1
3,75 95,25	5,3900 136,906	0,413 10,5	0,315 8	0,256 6,5	0,024 0,6	0,039 1	4,28 101,2	4,28 108,6	5,17 108,6	5,63 131,4	0,024 0,6	0,039 1
	5,7500 146,05	0,413 10,5	0,394 10	0,315 8	0,079 2	0,039 1	4,17 105,8	4,37 110,9	5,49 110,9	6,00 139,5	0,079 2	0,039 1
	6,1250 164,465	0,433 11	0,394 10	0,315 8	0,079 2	0,043 1,1	4,45 113	4,90 124,5	6,18 124,5	6,73 157	0,079 2	0,043 1,1
4 101,6	5,7500 146,05	0,413 10,5	0,394 10	0,315 8	0,024 0,6	0,039 1	4,25 108	4,55 115,5	5,49 115,5	6,00 139,5	0,024 0,6	0,039 1
	6,4750 164,465	0,433 11	0,394 10	0,315 8	0,079 2	0,043 1,1	4,45 113	4,90 124,5	6,18 124,5	6,73 157	0,079 2	0,043 1,1
	7,1900 182,626	0,433 11	0,394 10	0,315 8	0,079 2	0,043 1,1	4,96 126	5,45 138,4	6,91 138,4	7,42 175,5	0,079 2	0,043 1,1
4,5 114,3	6,4750 164,465	0,433 11	0,394 10	0,315 8	0,039 1	0,043 1,1	4,82 122,5	5,14 122,5	6,18 130,5	6,73 157	0,039 1	0,043 1,1
	7,1900 182,626	0,433 11	0,394 10	0,315 8	0,079 2	0,043 1,1	4,96 126	5,45 138,4	6,91 138,4	7,42 175,5	0,079 2	0,043 1,1
	8,1560 207,162	0,591 15	0,433 11	0,315 8	0,079 2	0,043 1,1	5,98 152	6,46 164	7,78 197,5	8,41 213,5	0,079 2	0,043 1,1
4,75 120,65	6,8250 173,355	0,433 11	0,394 10	0,315 8	0,039 1	0,043 1,1	5,08 129	5,41 137,5	6,56 137,5	7,05 179	0,039 1	0,043 1,1
	7,1900 182,626	0,433 11	0,394 10	0,315 8	0,039 1	0,043 1,1	5,33 135,5	5,69 144,5	6,91 175,5	7,42 188,5	0,039 1	0,043 1,1
5 127	7,1900 182,626	0,433 11	0,394 10	0,315 8	0,039 1	0,043 1,1	5,33 135,5	5,69 144,5	6,91 175,5	7,42 188,5	0,039 1	0,043 1,1
	8,1560 207,162	0,591 15	0,433 11	0,315 8	0,079 2	0,043 1,1	5,98 152	6,46 164	7,78 197,5	8,41 213,5	0,079 2	0,043 1,1
5,5 139,7	8,1560 207,162	0,591 15	0,433 11	0,315 8	0,079 2	0,043 1,1	6,34 161	6,61 168	7,78 197,5	8,41 213,5	0,039 1	0,043 1,1
	8,1560 207,162	0,591 15	0,433 11	0,315 8	0,039 1	0,043 1,1	6,34 161	6,61 168	7,78 197,5	8,41 213,5	0,039 1	0,043 1,1


<sup>1)</sup> Equal to maximum shaft fillet radius r<sub>a</sub> max

<sup>2)</sup> Equal to maximum housing fillet radius r<sub>b</sub> max

## SKF Explorer steel/steel plain bearings


Radial spherical plain bearings with an extended inner ring, metric sizes

d 20 – 80 mm

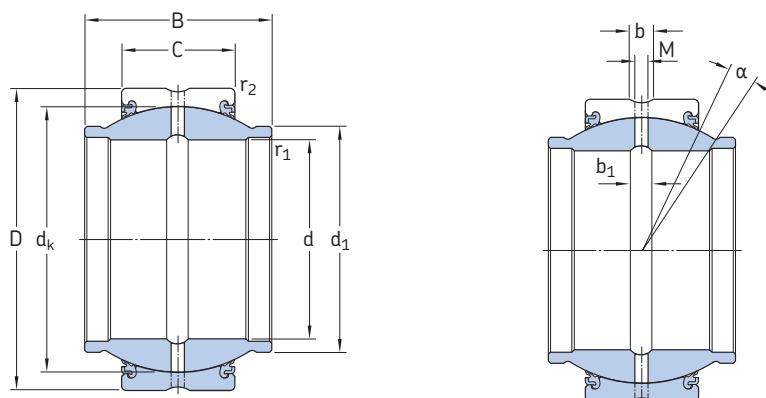

GEM .. ESX-2LS

Principal dimensions				Angle of tilt α	Basic load ratings dynamic C	static $C_0$	Mass kg	Designation
d mm	D	B	C	°	kN		–	
20	35	24	12	6	44	146	0,073	GEM 20 ESX-2LS
25	42	29	16	4	72	240	0,13	GEM 25 ESX-2LS
30	47	30	18	4	93	310	0,17	GEM 30 ESX-2LS
35	55	35	20	4	120	400	0,25	GEM 35 ESX-2LS
40	62	38	22	4	150	500	0,35	GEM 40 ESX-2LS
45	68	40	25	4	190	640	0,49	GEM 45 ESX-2LS
50	75	43	28	4	236	780	0,60	GEM 50 ESX-2LS
60	90	54	36	3	365	1 220	1,15	GEM 60 ESX-2LS
70	105	65	40	4	465	1 560	1,65	GEM 70 ESX-2LS
80	120	74	45	4	600	2 000	2,50	GEM 80 ESX-2LS

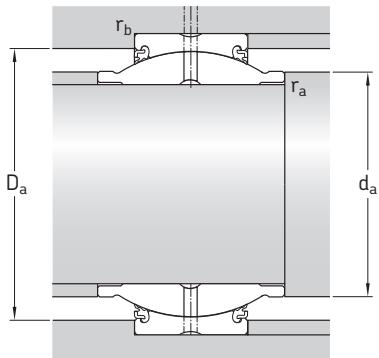

**Dimensions**
**Abutment and fillet dimensions**

d	d <sub>k</sub>	d <sub>1</sub>	b, b <sub>1</sub>	M	r <sub>1</sub> min.	r <sub>2</sub> min.	d <sub>a</sub> min.	d <sub>a</sub> max.	D <sub>a</sub> min.	D <sub>a</sub> max.	r <sub>a</sub> max.	r <sub>b</sub> max.
mm										mm		
20	29	24	3,1	2	0,3	0,3	23	24	30,9	33,2	0,3	0,3
25	35,5	29	3,1	2	0,3	0,6	28,3	29	36,9	39,2	0,3	0,6
30	40,7	34	3,1	2	0,3	0,6	33,5	34	41,3	44	0,3	0,6
35	47	40	3,9	2,5	0,6	1	38,8	40	48,5	50,9	0,6	1
40	53	45	3,9	2,5	0,6	1	44	45	54,5	57,8	0,6	1
45	60	52	4,6	3	0,6	1	49,6	52	61	63,6	0,6	1
50	66	57	4,6	3	0,6	1	54,8	57	66,2	70,5	0,6	1
60	80	68	6,2	4	0,6	1	65,4	68	79,7	84,2	0,6	1
70	92	78	7,7	4	0,6	1	75,7	78	92	99	0,6	1
80	105	90	7,7	4	0,6	1	86,1	90	104,4	113,8	0,6	1

# SKF Explorer steel/steel plain bearings

Radial spherical plain bearings with an extended inner ring, inch sizes


d 1 – 6 in.

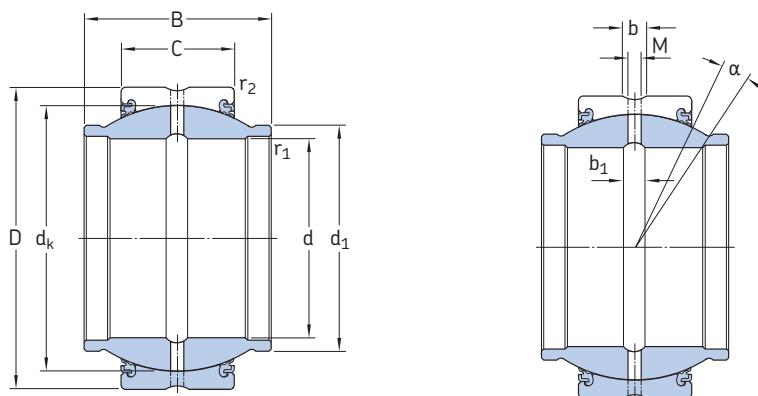

GEZM .. ESX-2LS

Principal dimensions				Angle of tilt <sup>1)</sup>	Basic load ratings dynamic	static	Mass	Designation
d	D	B	C	α	C	C <sub>0</sub>		
in./mm				°	lbf/kN	lb/kg	–	
<b>1</b> 25,4	1.6250 41,275	1.500 38,1	0.750 19,05	5	18 600 83	37 350 166	0.33 0,15	GEZM 100 ESX-2LS
<b>1.25</b> 31,75	2.0000 50,8	1.875 47,625	0.937 23,8	5	29 000 129	58 500 260	0.64 0,29	GEZM 104 ESX-2LS
<b>1.375</b> 34,925	2.1875 55,563	2.062 52,375	1.031 26,187	5	35 400 156	69 750 310	0.82 0,37	GEZM 106 ESX-2LS
<b>1.5</b> 38,1	2.4375 61,913	2.250 57,15	1.125 28,575	5	41 500 186	84 380 375	1.12 0,51	GEZM 108 ESX-2LS
<b>1.75</b> 44,45	2.8125 71,438	2.625 66,675	1.312 33,325	5	57 000 255	114 750 510	1.79 0,81	GEZM 112 ESX-2LS
<b>2</b> 50,8	3.1875 80,963	3.000 76,2	1.500 38,1	5	75 000 335	150 750 670	2.65 1,20	GEZM 200 ESX-2LS
<b>2.25</b> 57,15	3.5625 90,488	3.375 85,725	1.687 42,85	5	95 000 425	191 250 850	3.65 1,65	GEZM 204 ESX-2LS
<b>2.5</b> 63,5	3.9375 100,013	3.750 95,25	1.875 47,625	5	116 000 520	234 000 1 040	4.95 2,25	GEZM 208 ESX-2LS
<b>2.75</b> 69,85	4.3750 111,125	4.125 104,775	2.062 52,375	5	140 000 630	285 750 1 270	6.85 3,10	GEZM 212 ESX-2LS
<b>3</b> 76,2	4.7500 120,65	4.500 114,3	2.250 57,15	5	170 000 750	337 500 1 500	8.80 4,00	GEZM 300 ESX-2LS
<b>3.25</b> 82,55	5.1250 130,175	4.875 123,825	2.437 61,9	5	196 000 880	396 000 1 760	11.0 5,00	GEZM 304 ESX-2LS
<b>3.5</b> 88,9	5.5000 139,7	5.250 133,35	2.625 66,675	5	228 000 1 020	459 000 2 040	14.0 6,25	GEZM 308 ESX-2LS
<b>3.75</b> 95,25	5.8750 149,225	5.625 142,875	2.812 71,425	5	265 000 1 180	531 000 2 360	17.0 7,60	GEZM 312 ESX-2LS
<b>4</b> 101,6	6.2500 158,75	6.000 152,4	3.000 76,2	5	305 000 1 340	596 250 2 650	20.0 9,10	GEZM 400 ESX-2LS

<sup>1)</sup> To fully utilize the angle of tilt, the shaft shoulder should not be made larger than  $d_{a\max}$

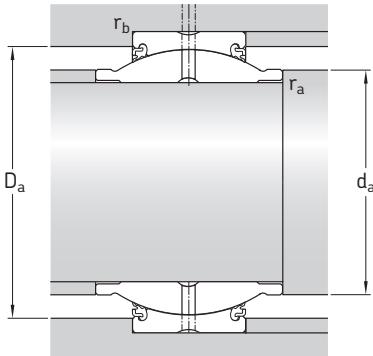
**Dimensions**
**Abutment and fillet dimensions**

d	d_k	d <sub>1</sub>	b	b <sub>1</sub>	M	r <sub>1</sub> <sup>1)</sup> min.	r <sub>2</sub> <sup>2)</sup> min.	d <sub>a</sub> min.	d <sub>a</sub> max.	D <sub>a</sub> min.	D <sub>a</sub> max.	r <sub>a</sub> max.	r <sub>b</sub> max.	
in./mm										in./mm				
<b>1</b> 25,4	1,4370 36,5	1,220 30,988	0,126 3,2	0,118 3	0,098 2,5	0,024 0,6	0,039 1	1,11 28,2	1,22 31	1,39 35,2	1,48 37,7	0,024 0,6	0,039 1	
<b>1,25</b> 31,75	1,7950 45,593	1,525 38,735	0,189 4,8	0,197 5	0,157 4	0,039 1	0,039 1	1,41 35,8	1,52 38,7	1,76 44,8	1,85 47	0,039 1	0,039 1	
<b>1,375</b> 34,925	1,9370 49,2	1,670 42,418	0,189 4,8	0,197 5	0,157 4	0,039 1	0,039 1	1,54 39,1	1,67 42,4	1,85 47,1	2,04 51,7	0,039 1	0,039 1	
<b>1,5</b> 38,1	2,1550 54,737	1,850 46,99	0,189 4,8	0,197 5	0,157 4	0,039 1	0,039 1	1,70 43,3	1,85 47	2,06 52,3	2,28 58	0,039 1	0,039 1	
<b>1,75</b> 44,45	2,5150 63,881	2,165 54,991	0,189 4,8	0,197 5	0,157 4	0,039 1	0,039 1	1,96 49,9	2,17 55	2,41 61,3	2,65 67,4	0,039 1	0,039 1	
<b>2</b> 50,8	2,8750 73,025	2,460 62,484	0,189 4,8	0,197 5	0,157 4	0,039 1	0,039 1	2,22 56,5	2,46 62,5	2,85 72,4	2,99 75,9	0,039 1	0,039 1	
<b>2,25</b> 57,15	3,2350 82,169	2,760 70,104	0,224 5,7	0,197 5	0,157 4	0,039 1	0,039 1	2,48 63,1	2,76 70,1	3,11 79	3,36 85,3	0,039 1	0,039 1	
<b>2,5</b> 63,5	3,5900 91,186	3,060 77,724	0,354 9	0,315 8	0,256 6,5	0,039 1	0,039 1	2,74 69,6	3,06 77,7	3,43 87	3,73 94,7	0,039 1	0,039 1	
<b>2,75</b> 69,85	3,9500 100,33	3,380 85,852	0,354 9	0,315 8	0,256 6,5	0,039 1	0,039 1	3,00 76,2	3,38 85,9	3,78 96	4,16 105,7	0,039 1	0,039 1	
<b>3</b> 76,2	4,3120 109,525	3,675 93,345	0,354 9	0,315 8	0,256 6,5	0,039 1	0,039 1	3,26 82,8	3,67 93,3	4,13 104,8	4,53 115	0,039 1	0,039 1	
<b>3,25</b> 82,55	4,6750 118,745	3,985 101,219	0,366 9,3	0,315 8	0,256 6,5	0,039 1	0,039 1	3,52 89,4	3,98 101,2	4,50 114,2	4,90 124,4	0,039 1	0,039 1	
<b>3,5</b> 88,9	5,0400 128,016	4,300 109,22	0,413 10,5	0,315 8	0,256 6,5	0,039 1	0,039 1	3,78 95,9	4,30 109,2	4,83 122,8	5,27 133,8	0,039 1	0,039 1	
<b>3,75</b> 95,25	5,3900 136,906	4,590 116,586	0,413 10,5	0,315 8	0,256 6,5	0,039 1	0,039 1	4,04 102,5	4,59 116,6	5,17 131,4	5,63 143,1	0,039 1	0,039 1	
<b>4</b> 101,6	5,7500 146,05	4,905 124,587	0,413 10,5	0,394 10	0,315 8	0,059 1,5	0,039 1	4,33 110	4,91 124,6	5,49 139,5	6,00 152,5	0,059 1,5	0,039 1	


<sup>1)</sup> Equal to maximum shaft fillet radius r<sub>a</sub> max

<sup>2)</sup> Equal to maximum housing fillet radius r<sub>b</sub> max

## SKF Explorer steel/steel plain bearings


Radial spherical plain bearings with an extended inner ring, inch sizes

d 1 – 6 in.

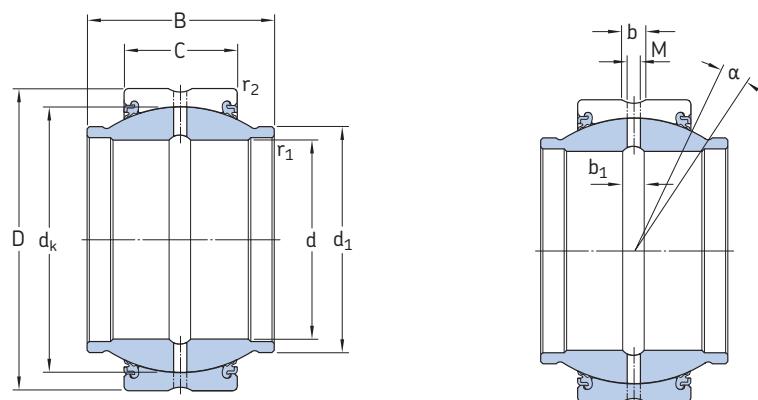

GEZM .. ESX-2LS

Principal dimensions				Angle of tilt	Basic load ratings dynamic	static	Mass	Designation
d	D	B	C	α	C	C <sub>0</sub>		
in./mm				°	lbf/kN		lb/kg	–
<b>4.5</b> 114,3	7.0000 177,8	6.750 171,45	3.375 85,725	5	375 000 1 700	765 000 3 400	28,5 13,0	<b>GEZM 408 ESX-2LS</b>
<b>5</b> 127	7.7500 196,85	7.500 190,5	3.750 95,25	5	465 000 2 080	933 750 4 150	38,5 17,5	<b>GEZM 500 ESX-2LS</b>
<b>6</b> 152,4	8.7500 222,25	8.250 209,55	4.125 104,775	5	585 000 2 600	1 170 000 5 200	47,5 21,5	<b>GEZM 600 ESX-2LS</b>

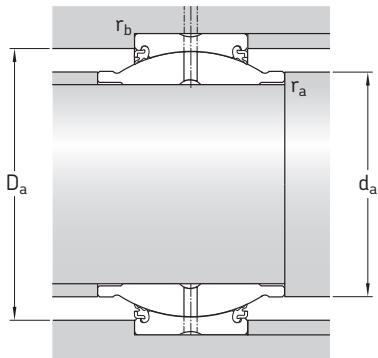

#### Dimensions

#### Abutment and fillet dimensions

d	d_k	d <sub>1</sub>	b	b <sub>1</sub>	M	r <sub>1</sub> <sup>1)</sup> min.	r <sub>2</sub> <sup>2)</sup> min.	d <sub>a</sub> min.	d <sub>a</sub> max.	D <sub>a</sub> min.	D <sub>a</sub> max.	r <sub>a</sub> max.	r <sub>b</sub> max.	
in./mm										in./mm				
<b>4.5</b> 114,3	6.4750 164,465	5.525 140,335	0.433 11	0.394 10	0.315 8	0.079 2	0.043 1,1	4.94 125,5	5.52 140,3	6.18 157	6.73 171	0.079 2	0.043 1,1	
<b>5</b> 127	7.1900 182,626	6.130 155,702	0.433 11	0.394 10	0.315 8	0.079 2	0.043 1,1	5.45 138,5	6.13 155,7	6.91 175,5	7.42 188,5	0.079 2	0.043 1,1	
<b>6</b> 152,4	8.1560 207,162	7.020 178,308	0.591 15	0.433 11	0.315 8	0.079 2	0.043 1,1	6.46 164	7.02 178,3	7.78 197,5	8.41 213,5	0.079 2	0.043 1,1	


<sup>1)</sup> Equal to maximum shaft fillet radius r<sub>a</sub> max

<sup>2)</sup> Equal to maximum housing fillet radius r<sub>b</sub> max


# SKF Explorer steel/steel plain bearings

Rod ends with a female thread

d 20 – 80 mm

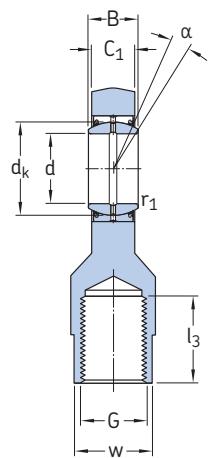

SI(L) .. ESX-2LS

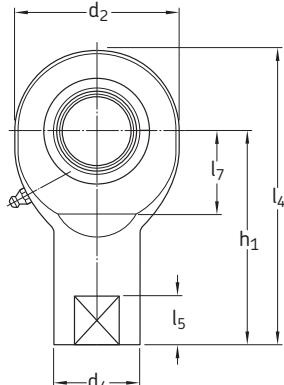

d	d <sub>2</sub> max	G 6H	B	C <sub>1</sub> max	h <sub>1</sub>	α	Angle of tilt		Basic load ratings dynamic	Basic load ratings static	Mass	Designations	
							°					Rod end with right-hand thread	left-hand thread
mm							°				kg	–	–
20	54	M 20x1,5	16	13,5	77	9	44	57	0,36	SI 20 ESX-2LS	SIL 20 ESX-2LS		
25	65	M 24x2	20	18	94	7	72	90	0,65	SI 25 ESX-2LS	SIL 25 ESX-2LS		
30	75	M 30x2	22	20	110	6	93	116	1,00	SI 30 ESX-2LS	SIL 30 ESX-2LS		
35	84	M 36x3	25	22	130	6	120	134	1,40	SI 35 ESX-2LS	SIL 35 ESX-2LS		
40	94	M 39x3	28	24	142	6	150	166	2,20	SIA 40 ESX-2LS	SILA 40 ESX-2LS		
	94	M 42x3	28	24	145	6	150	166	2,30	SI 40 ESX-2LS	SIL 40 ESX-2LS		
45	104	M 42x3	32	28	145	7	190	224	2,90	SIA 45 ESX-2LS	SILA 45 ESX-2LS		
	104	M 45x3	32	28	165	7	190	224	3,20	SI 45 ESX-2LS	SIL 45 ESX-2LS		
50	114	M 45x3	35	31	160	6	236	270	4,10	SIA 50 ESX-2LS	SILA 50 ESX-2LS		
	114	M 52x3	35	31	195	6	236	270	4,50	SI 50 ESX-2LS	SIL 50 ESX-2LS		
60	137	M 52x3	44	39	175	6	365	400	6,30	SIA 60 ESX-2LS	SILA 60 ESX-2LS		
	137	M 60x4	44	39	225	6	365	400	7,10	SI 60 ESX-2LS	SIL 60 ESX-2LS		
70	162	M 56x4	49	43	200	6	465	530	9,50	SIA 70 ESX-2LS	SILA 70 ESX-2LS		
	162	M 72x4	49	43	265	6	465	530	10,5	SI 70 ESX-2LS	SIL 70 ESX-2LS		
80	182	M 64x4	55	48	230	5	600	655	15,0	SIA 80 ESX-2LS	SILA 80 ESX-2LS		
	182	M 80x4	55	48	295	5	600	655	19,0	SI 80 ESX-2LS	SIL 80 ESX-2LS		

---


**Dimensions**

d	d <sub>k</sub>	d <sub>4</sub> ~	l <sub>3</sub> min.	l <sub>4</sub> max.	l <sub>5</sub> ~	l <sub>7</sub> min.	r <sub>1</sub> min.	w h14
<hr/>								
mm								
<b>20</b>	29	28	30	106	16	24	0,3	24
<b>25</b>	35,5	35	36	128	18	30	0,6	30
<b>30</b>	40,7	42	45	149	19	34	0,6	36
<b>35</b>	47	49	60	174	25	36	0,6	41
<b>40</b>	53 53	58 58	65 65	191 194	25 25	40 40	0,6 0,6	50 50
<b>45</b>	60 60	65 65	65 65	199 219	30 30	48 48	0,6 0,6	55 55
<b>50</b>	66 66	70 70	68 68	219 254	30 30	58 58	0,6 0,6	60 60
<b>60</b>	80 80	82 82	70 70	246 296	35 35	68 68	1 1	70 70
<b>70</b>	92 92	92 92	80 80	284 349	40 40	78 78	1 1	80 80
<b>80</b>	105 105	105 105	85 85	324 389	45 45	88 88	1 1	90 90


# SKF Explorer steel/steel plain bearings

Rod ends with a male thread

d 20 – 80 mm

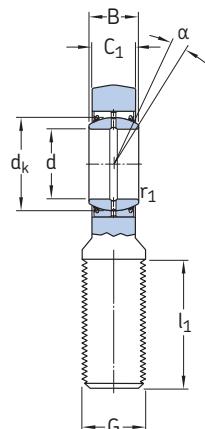

SA(L) .. ESX-2LS

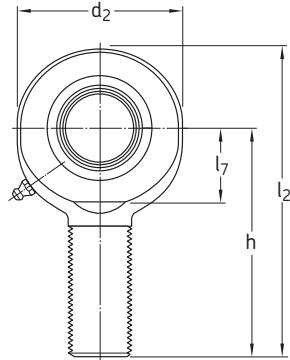

Principal dimensions						Angle of tilt α	Basic load ratings dynamic C <sup>1)</sup>	Basic load ratings static C <sub>0</sub>	Mass kg	Designations
d	d <sub>2</sub> max	G 6g	B	C <sub>1</sub> max	h	°	kN	kg	Rod end with right-hand thread	left-hand thread
mm										
20	54	M 20x1,5	16	13,5	78	9	44	42,5	0,32	SA 20 ESX-2LS
25	65	M 24x2	20	18	94	7	72	78	0,53	SA 25 ESX-2LS
30	75	M 30x2	22	20	110	6	93	81,5	0,90	SA 30 ESX-2LS
35	84	M 36x3	25	22	130	6	120	110	1,30	SA 35 ESX-2LS
40	94	M 39x3	28	24	150	6	150	140	1,85	SAA 40 ESX-2LS
	94	M 42x3	28	24	145	6	150	140	1,90	SA 40 ESX-2LS
45	104	M 42x3	32	28	163	7	190	200	2,45	SAA 45 ESX-2LS
	104	M 45x3	32	28	165	7	190	200	2,55	SA 45 ESX-2LS
50	114	M 45x3	35	31	185	6	236	245	3,30	SAA 50 ESX-2LS
	114	M 52x3	35	31	195	6	236	245	3,90	SA 50 ESX-2LS
60	137	M 52x3	44	39	210	6	365	360	5,70	SAA 60 ESX-2LS
	137	M 60x4	44	39	225	6	365	360	6,25	SA 60 ESX-2LS
70	162	M 56x4	49	43	235	6	465	490	7,90	SAA 70 ESX-2LS
	162	M 72x4	49	43	265	6	465	490	10,00	SA 70 ESX-2LS
80	182	M 64x4	55	48	270	5	600	585	12,00	SAA 80 ESX-2LS
	182	M 80x4	55	48	295	5	600	585	14,50	SA 80 ESX-2LS
SAL 20 ESX-2LS										
SAL 25 ESX-2LS										
SAL 30 ESX-2LS										
SAL 35 ESX-2LS										
SALA 40 ESX-2LS										
SAL 40 ESX-2LS										
SALA 45 ESX-2LS										
SAL 45 ESX-2LS										
SALA 50 ESX-2LS										
SAL 50 ESX-2LS										
SALA 60 ESX-2LS										
SAL 60 ESX-2LS										
SALA 70 ESX-2LS										
SAL 70 ESX-2LS										
SALA 80 ESX-2LS										
SAL 80 ESX-2LS										

<sup>1)</sup> Dynamic load rating of the bearing to be used for basic rating life calculation only.  
Check suitability of the rod end against its static load rating in all cases.

The dynamic load applied on the rod end must not exceed its static load rating.

---

**Dimensions**

d	d <sub>k</sub>	l <sub>1</sub> min.	l <sub>2</sub> max.	l <sub>7</sub> min.	r <sub>1</sub> min.
<hr/>					
mm					
20	29	43	107	24	0,3
25	35,5	53	128	30	0,6
30	40,7	60	149	34	0,6
35	47	68	174	40	0,6
40	53 53	86 76	199 194	46 46	0,6 0,6
45	60 60	92 95	217 219	50 50	0,6 0,6
50	66 66	104 110	244 254	58 58	0,6 0,6
60	80 80	115 120	281 296	73 73	1 1
70	92 92	125 132	319 349	85 85	1 1
80	105 105	140 147	364 389	98 98	1 1

[skf.com](http://skf.com)

© SKF and SKF Explorer are registered trademarks of the SKF Group.

© SKF Group 2019

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB BU/S9 15521/1 EN · September 2019

Certain image(s) used under license from Shutterstock.com

